

Polyurethane (PU Tubing)

APPLICATIONS

It is widely used in air pressure, vacuum machine, industrial robot, automatic control panel & testing equipment.

FEATURE


- Various colours, easy to identify.
- Excellent flexibility at low temperature.
- Lightweight, easy to design compact type.
- Ultra softness enables to display excellent efficiency in pipping.

MATERIAL

Polyurethane

TEMPERATURE

-20°C to + 80°C

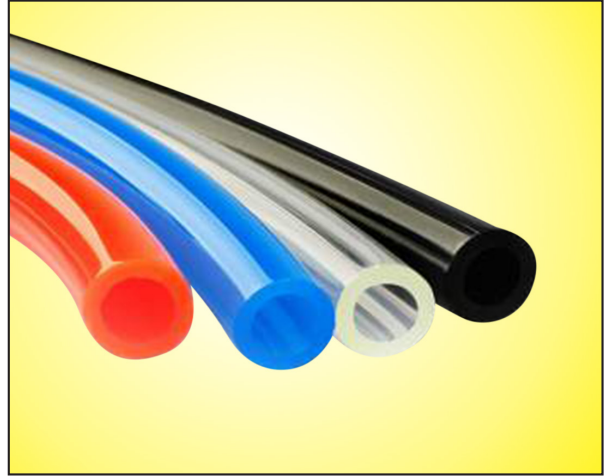

| Code | O.D. (mm) | I.D. (mm) | Working / Burst Pressure (bar) | Weight (kg/m) | Length per roll (mt) |
|-----------|-----------|-----------|--------------------------------|---------------|----------------------|
| PU - 0402 | 4.0 | 2.0 | 8 / 24 | 0.11 | 100 |
| PU - 0604 | 6.0 | 4.0 | 8 / 24 | 0.19 | 100 |
| PU - 0850 | 8.0 | 5.5 | 8 / 24 | 0.37 | 100 |
| PU - 1065 | 10.0 | 6.5 | 8 / 24 | 0.55 | 100 |
| PU - 1280 | 12.0 | 8.0 | 8 / 24 | 0.76 | 100 |