


- Meets the following performance requirements:
 - DNV 2.7-1
 - EN 1677-4
 - ASME B30.26
- 20,000 cycle fatigue rated to 1.5 times Working Load Limit
- Charpy test of 42 joules (31ft. lbs.) at -40°C (-40°F) for normal section
- Charpy test of 27 joules (20ft. lbs.) at -40°C (-40°F) for welding section

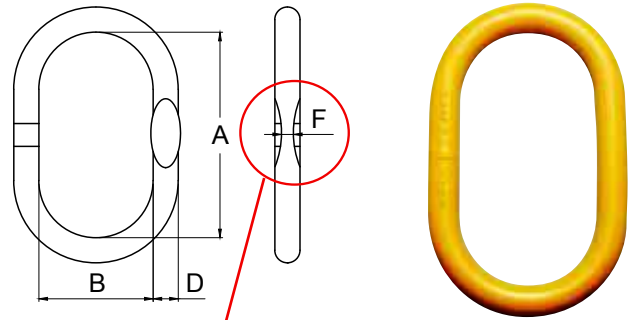

-40°C

- Engineered flat makes it simple to insert wire rope thimbles on our links.
- Suitable for omega links.

DA Master Link

Item No.	WLL	Proof Load	Dimensions (inch)				N.W.
	β 0-45° tonnes		D	A	B	F	
DA-003F-1310	6.7	164	3/4	6.30	3.54	0.33	2.4
DA-003F-1613	8.5	208	7/8	7.10	3.94	0.41	3.5
DA-003F-1916	11.5	282	1	8.27	4.53	0.53	5.3
DA-003F-20	13.0	319	1-1/8	10.83	5.71	0.53	8.6
DA-003F-2220	17.0	417	1-1/4	10.83	5.71	0.61	11.5
DA-003-2622	24.0	588	1-7/16	11.20	6.10	---	15.2
DA-003-28	28.1	689	1-9/16	11.80	6.30	---	19.8
DA-003-3226	38.3	939	1-3/4	13.40	7.10	---	28.2

*Welding Oblong Master Links
Design factor 5:1 proof tested and certified.

*F: Engineered flat

Item No.	WLL	Proof Load	Dimensions (mm)				N.W.
	β 0-45° tonnes		D	A	B	F	
DA-003F-1310	6.7	164	19	160	90	8.5	1.1
DA-003F-1613	8.5	208	22	180	100	10.5	1.6
DA-003F-1916	11.5	282	25	210	115	13.5	2.4
DA-003F-20	13.0	319	28	275	145	13.5	3.9
DA-003F-2220	17.0	417	32	275	145	15.5	5.2
DA-003-2622	24.0	588	36	285	155	---	6.9
DA-003-28	28.1	689	40	300	160	---	9.0
DA-003-3226	38.3	939	45	340	180	---	12.8

*Welding Oblong Master Links
Design factor 5:1 proof tested and certified.

*F: Engineered flat